



▶ APPLICATIONS :



▶ FEATURES :

- CV-CC Mode
- Independent setting of voltage & current
- Manual current limit option
- Protection : Short Circuit / Overload
- Mounting : panel / floor / wall

	ENDURANCE PERFORMANCE
	HIGH RELIABILITY & STABILITY
	MANUAL CURRENT LIMIT

▶ MORE APPLICATIONS




& many more....

▶ TECHNICAL SPECIFICATION :


Powertron 150 series DC Power Supply having below different voltage and current combination.

SPECIFICATIONS	PIPL-1510	PIPL-3005	PIPL-6003	PIPL-7502	PIPL-10002
Output Characteristics					
Voltage	0-15V	0-30V	0-60V	0-75V	0-100V
Current	0-10A	0-5A	0-2.5A	0-2A	0-1.5A
Max Power	150W	150W	150W	150W	150W
Input Characteristics					
Input Voltage	180V TO 270VAC (230VAC - 1Phase)				
Frequency	47-63Hz				
Efficiency	> 85%				
CV-CC Mode					
Line Regulation	<±0.5%				
Load Regulation	<±0.5%				
Ripple and Noise	1% P-P				
General					
Protection	Over Voltage, Over Load, Short Circuit, Over Temp.				
Operating Temperature	-5 to 55deg				
IO Isolation	I/P to O/P : 1.5KV & I/P TO GND : 500VDC				
Safety & EMC	Design to meet UL60950-1/ EN55011 / EN55022 & EN61000-4-2				
Cooling	Conventional Fan Cooled				
Dimensions	145 (W) x 210 (D) x 145 (H) MM				

▶ **PANEL DESIGN**

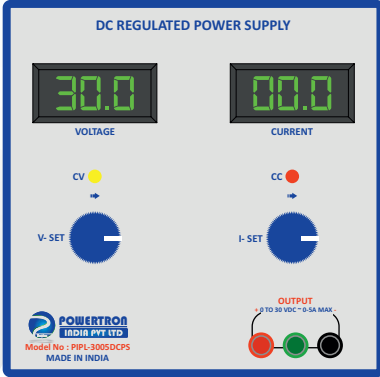


FRONT PANEL

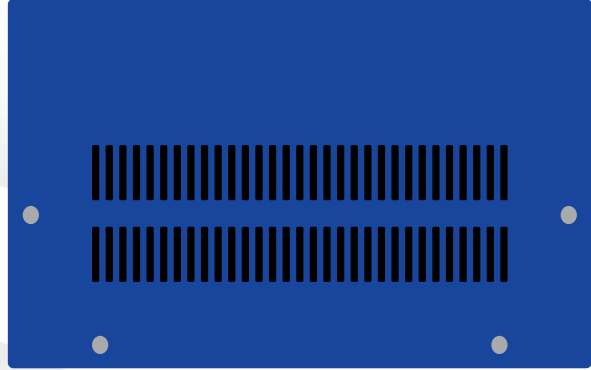


SIDE PANEL

▶ **DIMENSION : 145(W) X 210(D) X 145 (H) MM**

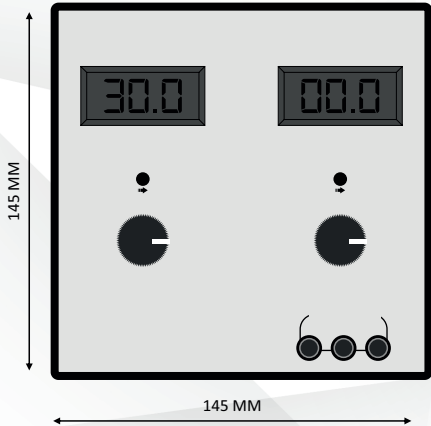

FRONT VIEW

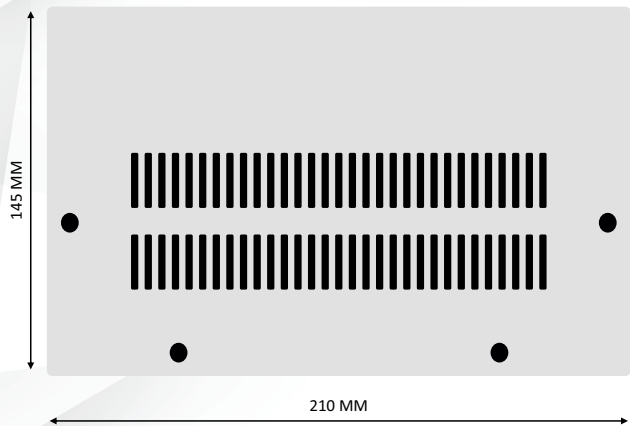

SIDE VIEW



Our Worldwide Customers



We assure you that our product will live up to your expectations.

If you have any questions, feel free to reach out.

We anticipate a positive response and value your feedback.

Thank You !